

Description


CL16512BA series is a built-in input OVP, high-efficiency DC to DC step down switching regulator, capable of delivering up to 1A output current. The CL16512BA operates in a wide range input voltage from 2.7V to 5.5V making the IC ideal for low voltage power conversions. Running at a fixed frequency of 1.5MHz allows the use of small inductance value and low DCR inductors, thereby achieving higher efficiency.

Features

- ◆ Up to 1A max output current
- ◆ Input OVP protection (typical value: 6.3V)
- ◆ 2.7V to 5.5V input voltage range
- ◆ Fixed 1.5MHz switching frequency
- ◆ Light Load operation
- ◆ 100% duty operation
- ◆ Internal compensation
- ◆ RoHS Compliant and Halogen Free


Applications

- ◆ USB Ports/Hubs
- ◆ Hot Swaps
- ◆ Cell Phones
- ◆ Tablet PC
- ◆ Set Top Boxes




CL16512BA is offered in SOT23-5L package

Typical Application

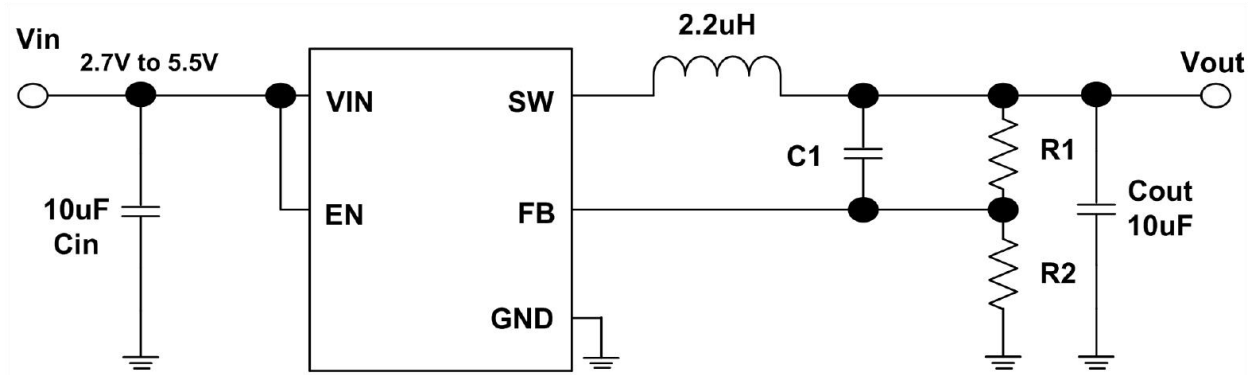

Pin Definition

SOT-23-5L



PACKAGE	MARKING	MARKING DESCRIPTION
ABYWBA	AB	Chip series model (Fixed code)
	YW	Year week code
	BA	Light load and high efficiency (Fixed code)

Pin Description

PIN NO.	PIN NAME	DESCRIPTION
1	EN	Turns on/turns off control input.
2	GND	Power ground pin.
3	SW	Inductor pin. Connect this pin to the switching node of inductor.
4	VIN	Power input pin.
5	FB	Output feedback pin $V_{out}=0.6 \cdot (1+R1/R2)$.

Universal Naming Convention

CL 16512 BA
① ② ③

- ①: Abbreviation of product company name
- ②: Series model
- ③: Light load and high efficiency model

Absolute Maximum Ratings

PARAMETER	SYMBOL	RATING	UNIT
Input voltage	V_{IN}	-0.3 ~ 6.5 V	V
SW (DC), FB voltage	$V_{SW(DC)}$	$V_{SS}-0.3 \sim V_{IN}$	V
SW (AC, less than 10nS) voltage	$V_{SW(AC)}$	$V_{SS}-0.3 \sim V_{OUT}+6.5$	V
Operating temp.	T_J	-40 ~ +150	°C
Storage temp.	T_{STG}	-55 ~ +150	°C
Lead temp.	T_{SOLDER}	260°C, 10s	°C


Package Dissipation Level

PACKAGE	R θ JA (°C/W)
SOT23-5L	250
Power waste PD@T _A =25°C, SOT23-5	0.4W

ESD And Latch-up Grade

Human body model ESD level	2000V
----------------------------	-------

Function Block Diagram

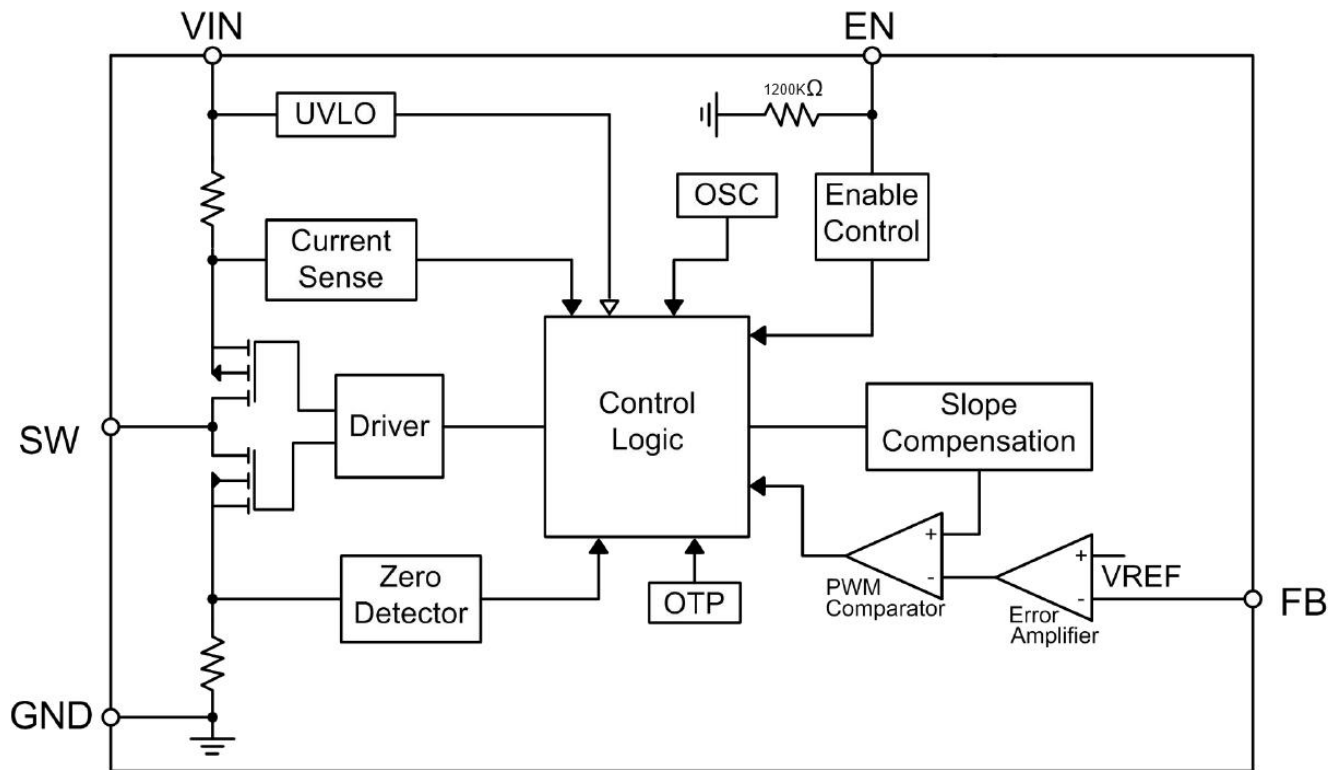

Electrical Characteristics

($V_{IN}=5V$, $T_A = 25^{\circ}C$ unless otherwise specified)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
Input voltage		2.7		5.5	V
Input OVP protection voltage			6.3		V
UVLO threshold			2.5		V
UVLO hysteresis			0.15		V
Quiescent current	$V_{IN}=5V$, $V_{OUT}=1.2V$		50		μA
Shutdown supply current	$V_{EN}=0V$		0.1	1	μA
Reference voltage	$V_{IN}=2.7$ to $5.5V$	0.588	0.6	0.612	V
Reference current			0.01		μA
Maximum duty		100			%
Switching frequency			1.5		MHz
Short switching frequency			380		KHz
Internal soft-start Time			1		ms
High side MOSFET on-resistance			220		m Ω
Low side MOSFET on-resistance			130		m Ω
High side MOSFET current limit			2.2		A
High side MOSFET leakage current	$V_{IN}=5V$, $V_{FB}=0.7V$			10	μA
EN pin pull-low resistance			1.2		M Ω
EN pin input low voltage				0.4	V
EN pin input high voltage		1.5			V
Output discharge switch on resistance	$V_{EN}=0V$		140		Ω
Thermal shutdown temperature			160		$^{\circ}C$

Function Description

CL16512BA high efficiency switching regulator is a small, simple, DC-to-DC step-down converter capable of delivering up to 1A of output current. The device operates in pulse-width modulation (PWM) at 1.5MHz from 2.7V to 5.5V input voltage and provides an output voltage from 0.6V to VIN, making the IC ideal for on-board post-regulation applications. An internal synchronous rectifier improves efficiency and eliminates the typical Schottky free-wheeling diode. Using the on resistance of the internal high-side MOSFET to sense switching currents eliminates current-sense resistors, further improving efficiency and reducing cost.

•Loop Operation

The IC uses a PWM current-mode control scheme. An open-loop comparator compares the integrated voltage-feedback signal against the sum of the amplified current-sense signal and the slope compensation ramp. At each rising edge of the internal clock, the internal high-side MOSFET turns on until the PWM comparator terminates the on cycle. During this on-time, current ramps up through the inductor, sourcing current to the output and storing energy in the inductor. The current mode feedback system regulates the peak inductor current as a function of the output voltage error signal. During the off cycle, the internal high-side P-channel MOSFET turns off, and the internal low-side N-channel MOSFET turns on. The inductor releases the stored energy as its current ramps down.

•Current Sense

An internal current-sense amplifier senses the current through the high-side MOSFET during on time and produces a proportional current signal which is used to sum the slope compensation signal. The summed signal then is compared with the error amplifier output by the PWM comparator to terminate the on cycle.

•Current Limit

There is a cycle-by-cycle current limit on the high-side MOSFET. When the current flowing out of SW exceeds this limit, the high-side MOSFET turns off and the synchronous rectifier turns on. The IC utilizes a frequency fold-back mode to prevent overheating during short-circuit output conditions. The device enters frequency fold-back mode when the FB voltage drops below 250mV, limiting the current to IPEAK and reducing power dissipation. Normal operation resumes upon removal of the short-circuit condition.

•Soft-Start

The IC has an internal soft-start circuit to reduce supply inrush current during startup conditions. When the device exits under-voltage lockout (UVLO), shutdown mode, or restarts following a thermal-overload event, the soft-start circuit slowly ramps up the output voltage.

•UVLO and Thermal Shutdown


If VIN drops below 2.5V, the UVLO circuit inhibits switching. Once VIN rises above 2.7V, the UVLO clears, and the soft-start sequence activates. Thermal-overload protection limits total power dissipation in the device. When the junction

temperature exceeds $T_J = +160^{\circ}\text{C}$, a thermal sensor forces the device to shutdown, allowing the die to cool down. The thermal sensor turns the device on again after the junction temperature falls below 60°C . After a thermal-shutdown condition, the soft-start sequence begins.

Application Information

•Setting Output Voltages

The resistive voltage divider allows the FB pin to sense a fraction of the output voltage shown as below.

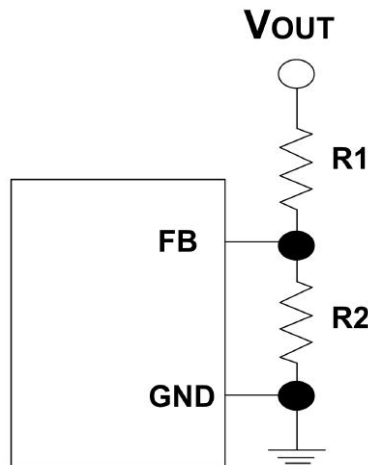

For adjustable voltage mode, the output voltage is set by an external resistive voltage divider according to the following equation:

$$V_{OUT} = V_{FB} \left(1 + \frac{R1}{R2} \right)$$

where V_{FB} is the feedback reference voltage (0.6V typ.).

•Inductor Selection

The peak-to-peak ripple is set to 30% of the output current. This places the peak current far enough from the minimum over current trip level to ensure reliable operation while providing enough current ripples for the current mode converter to operate stably. The inductance is determined as expressed in the following equation:

$$L \geq \frac{(V_{IN} - V_{OUT}) \times D}{\Delta I_L \times f_{SW}}$$

Where ΔI_L is the inductor peak-to-peak ripple current D is the duty cycle determined by V_{OUT}/V_{IN} f_{SW} is the switching frequency.

•Output Capacitor Selection

For most applications a nominal 10μF or 22μF capacitor is suitable. The output capacitor keeps output ripple small and ensures control-loop stability.

The output capacitor must also have low impedance at the switching frequency. Ceramic, polymer, and Tantalum capacitors are suitable, with ceramic exhibiting the lowest ESR and high-frequency impedance. Output ripple with a ceramic output capacitor is approximately as follows:

$$V_{OUT} \leq \Delta I_L \left[ESR + \frac{1}{8fC_{OUT}} \right]$$


•Input Capacitor Selection

The input capacitance, C_{IN}, is needed to filter the trapezoidal current at the source of the top MOSFET. To prevent large ripple current, a low ESR input capacitor sized for the maximum RMS current should be used. The RMS current is given by

$$I_{RMS} = I_{OUT} \times \sqrt{D \times (1 - D)}$$

This formula has a maximum at $V_{IN} = 2V_{OUT}$, where $I_{RMS} = I_{OUT}/2$

Package Mechanical Data: SOT-23-5L

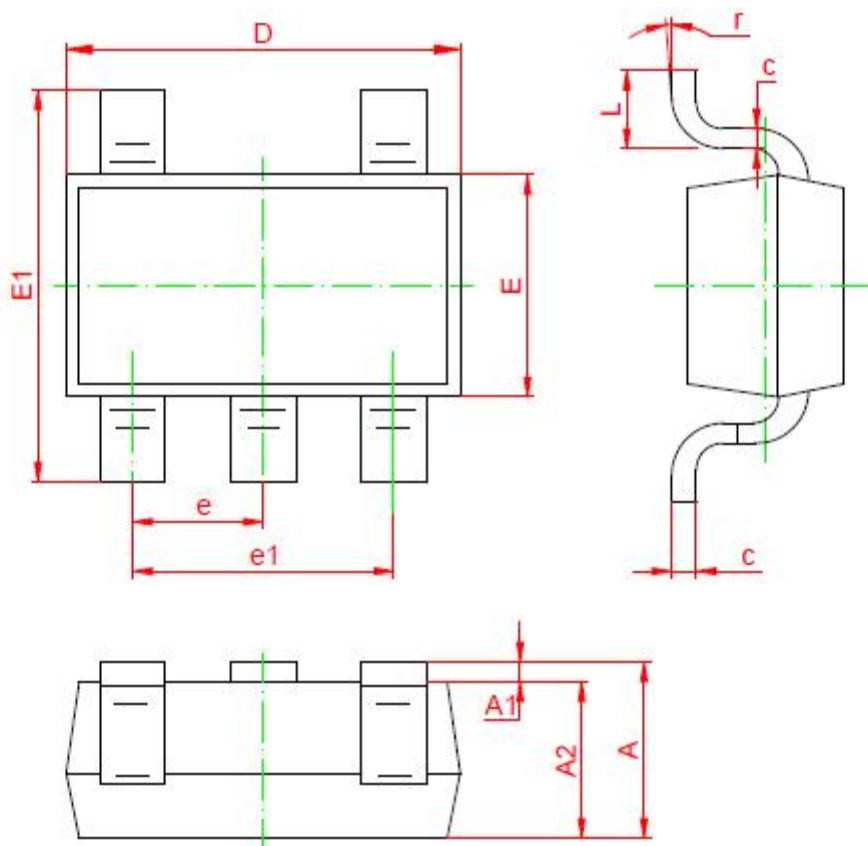

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 (BSC)		0.037 (BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
r	0°	8°	0°	8°

- The information described herein is subject to change without notice.
- CHIPLINK Technology is not responsible for any problems caused by circuits or diagrams described herein whose related industrial properties, patents, or other rights belong to third parties. The application circuit examples explain typical applications of the products, and do not guarantee the success of any specific mass-production design.
- When the products described herein are regulated products subject to the Wassenaar Arrangement or other agreements, they may not be exported without authorization from the appropriate governmental authority.
- Use of the information described herein for other purposes and/or reproduction or copying without the express permission of CHIPLINK Technology is strictly prohibited.
- The products described herein cannot be used as part of any device or equipment affecting the human body, such as exercise equipment, medical equipment, security systems, gas equipment, or any apparatus installed in airplanes and other vehicles, without prior written permission of CHIPLINK Technology
- Although CHIPLINK Technology exerts the greatest possible effort to ensure high quality and reliability, the failure or malfunction of semiconductor products may occur. The user of these products should therefore give thorough consideration to safety design, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue.